

HEP1 | ELECTRIC DRIVEN LIGHTWEIGHT MINI PUMPS WITH CARRYING STRAP




Working pressure 10000 psi

Two stage operation

Lightweight, compact design

- ▶ Oil reservoir capacity 48.82 inch³
- ▶ Choice of 110 or 240 volt single phase electric motor with 2-way electric solenoid valve
- ▶ Internal safety overload valve
- ▶ Remote hand pendant controller with 10 feet cable
- ▶ Supplied with handy carrying strap

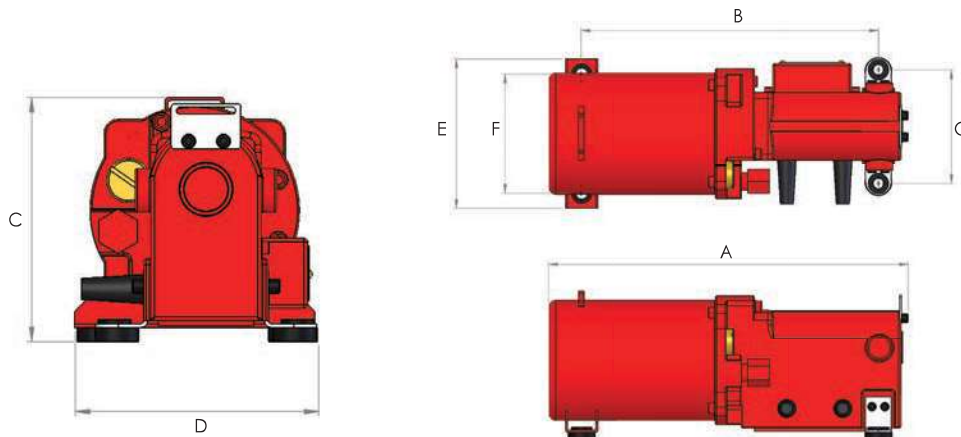

Model number	Motor voltage	Maximum flow rate (in ³ /min)		Valve type	Usable oil capacity (in ³)	Weight (lbs)	Dimensions (in)						
		1 st stage	2 nd stage				A	B	C	D	E	F	G
HEP1211S	110V - 1Ph	122.05	12.2	2-way	48.82	16.5	13.12	10.6	5.52	5.48	5.44	4.33	4.14
HEP1212S	240V - 1Ph	122.05	12.2	2-way	48.82	16.5	13.12	10.6	5.52	5.48	5.44	4.33	4.14