

NS | SINGLE ACTING NUT SPLITTERS




Nut AF sizes from 1 1/16" to 2 15/16"

Bolt sizes from 1/2" to 1 7/8"

Working pressure 10000 psi

- ▶ Single acting, spring assisted return
- ▶ Angled body design for increased clearance on flanges and flat surfaces
- ▶ High quality steel construction
- ▶ Suitable for splitting nuts up to RC44 hardness
- ▶ Designed to fit on all API and ANSI flanges
- ▶ Offers ideal 'cold cut' solution for applications where 'hot work' permits are not allowed
- ▶ Steel linkage keeps blade cutting edge parallel to the nut throughout the splitting process
- ▶ Compact and easy to use
- ▶ Optional 360° positional swivel coupling for fitment in confined spaces, available for use with NS104 and NS110 models only

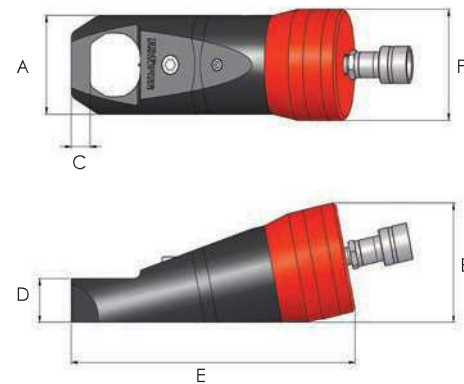

Model number	Capacity (tons)	Oil capacity (in³)	Hexagon AF sizes		Stud bolt thread sizes		Weight (lbs)	Dimensions (in)					
			inch	mm	imperial	metric		A	B	C	D	E	F
NS104	18	18	1 1/16" - 1 1/4"	17 - 32	1/2" - 3/4"	M10 - M22	8.8	2.52	3.03	0.49	1.18	8.27	2.64
NS110	27.4	27.4	1 1/4" - 1 5/8"	32 - 41	3/4" - 1"	M22 - M27	16.3	3.07	3.78	0.79	1.46	11.27	2.68
NS200	45.4	45.4	1 5/8" - 2"	41 - 50	1" - 1 1/4"	M27 - M33	23.4	3.78	4.57	0.83	1.69	12.41	4.26
NS206	63.7	63.7	2" - 2 3/8"	50 - 60	1 1/4" - 1 1/2"	M33 - M39	34.8	4.53	5.44	0.95	2.05	13.24	4.96
NS215	99.6	99.6	2 3/8" - 2 15/16"	60 - 75	1 1/2" - 1 7/8"	M39 - M48	86.6	6.15	6.9	1.06	2.96	16.78	6.38

Note: NS nut splitters are for use on heavy duty nuts, where the nut height is equal to or greater than two-thirds of the blade length of the tool being used.

Replacement blades for NS nut splitters

Blade part number	For nut splitter
NS104-B	NS104
NS110-B	NS110
NS200-B	NS200
NS206-B	NS206
NS215-B	NS215