


HSP | ELECTRIC DRIVEN SPLIT FLOW MULTI-OUTLET PUMPS



Working pressure 10000 psi

Efficient 3 phase motors with DC electric solenoids

Both single and double acting cylinder models available

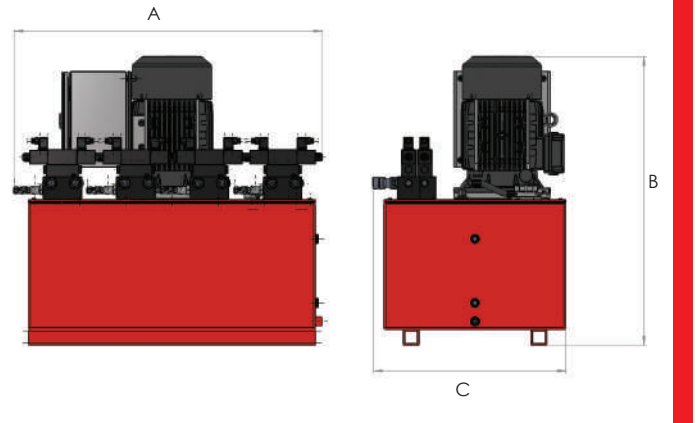

- ⇨ Selection of outlet valve configurations ranging from 4-outlet pump with manual valves to 8-outlet pump with electric solenoid valves
- ⇨ Control system with individual outlet selection switches, providing choice of single or multiple synchronized operation
- ⇨ Heavy duty completely enclosed, fan cooled three phase electric motor
- ⇨ Externally adjustable pressure setting valves on each outlet, for pre-setting pressure up to 10000 psi maximum

Model number	Valve configuration	Valve type	Oil capacity (gallons)	Oil flow per outlet (in ³ /min)	Motor voltage	Motor voltage (hp)	Weight (lbs)	Dimensions (in)		
								A	B	C
HSP4SM	4 x 3-way	manual	26.41	67.13	400V 50 Hz/460V 60 Hz-3Ph	10.05	599.7	39.4	35.85	24.03
HSP4DM	4 x 4-way	manual	26.41	67.13	400V 50 Hz/460V 60 Hz-3Ph	10.05	599.7	39.4	35.85	24.03
HSP4SE	4 x 3-way	electric	26.41	67.13	400V 50 Hz/460V 60 Hz-3Ph	10.05	604.1	39.4	35.85	24.03
HSP4DE	4 x 4-way	electric	26.41	67.13	400V 50 Hz/460V 60 Hz-3Ph	10.05	604.1	39.4	35.85	24.03
HSP6SE	6 x 3-way	electric	52.82	54.92	400V 50 Hz/460V 60 Hz-3Ph	14.74	738.5	49.25	41.76	31.52
HSP6DE	6 x 4-way	electric	52.82	54.92	400V 50 Hz/460V 60 Hz-3Ph	14.74	738.5	49.25	41.76	31.52
HSP8SE	8 x 3-way	electric	52.82	54.92	400V 50 Hz/460V 60 Hz-3Ph	14.74	815.7	49.25	41.76	31.52
HSP8DE	8 x 4-way	electric	52.82	54.92	400V 50 Hz/460V 60 Hz-3Ph	14.74	815.7	49.25	41.76	31.52

Note: All models are suitable for operation at 50 Hz and 60 Hz. 60 Hz models deliver approximately 15-20% higher flow rate.